Sensorex New "Calomel Free" Epoxy and Glass Body pH and Reference Electrodes



Fast Response...No Silver Ion Contamination

Use in Place of Calomel pH and Reference Electrodes

Combination Triple Junction Design

Uses No Hazardous Calomel Based Material (MERCURY-FREE!)/RoHS compliant

Sealed and Refillable Models

Glass and Epoxy Body Models

Calomel Free pH electrodes!

The performance of a Calomel electrode is now available without the hazardous Mercury associated with the design. The "Calomel Free" design features an Ag/AgCl based double junction reference with a unique *silver ion trap* acting as a third junction to impede any silver ion contact with the sample. Reference output is adjusted to deliver the same output as a Calomel electrode using a silver chloride reference.

Specifications

pH Range	0-14 (Na+ error >12.3 pH)	
Speed of Response	95% in 1 second	
Isopotential Point	pH 7.00 (0 mV)	
Offset	+/- 0.20 pH	
Span	97% or higher	
Temperature Range	0 - 60 Degrees C	
Cable Length	30" (0.76 m)	
Connectors	BNC for combination ("CIT"), 2mm pin for reference ("RIT")	

Glass or Plastic Body Electrodes!

Traditionally, pH electrodes have been made of all glass construction. However, today's thermoplastics are able to construct pH electrodes with durable and chemically resistant bodies to reduce any breakage. The protected design of the plastic body electrode extends over the measuring surface, making the pH glass bulb virtually unbreakable.

Sealed vs. Refillable Reference!

Both sealed and refillable styles are available. Sealed references are gel-filled and maintenance free while refillable designs extend electrode life by having a refillable reference electrolyte.

深圳市新世联科技有限公司

地址:深圳市深南中路2066号华能大厦712室


电话: 0755-83680810 83680820 83680830 83680860


网址: www.apollounion.com

邮编: 518031 传真: 0755-83680866

邮箱: sales@apollounion.com


Sensorex New "Calomel Free" Epoxy and Glass Body pH Electrodes S200CIT, S201CIT, S300CIT, S900CIT SG200CIT, SG201CIT, SG300CIT, SG900CIT

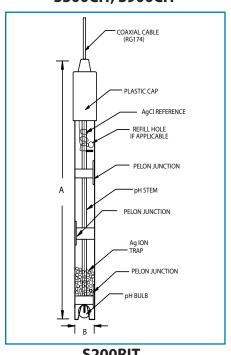


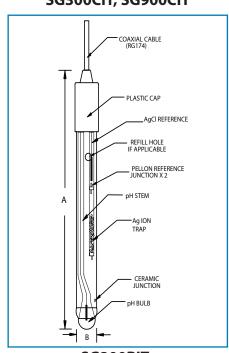

S200RIT

SG200RIT

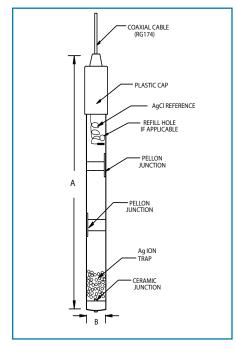



Dimension Key

- A=150mm x B=12mm A=300mm x B=9.5mm
- A=150mm x B=6mm

深圳市新世联科技有限公司

地址:深圳市深南中路2066号华能大厦712室

电话: 0755-83680810 83680820 83680830 83680860

网址: www.apollounion.com

邮编:518031

传真: 0755-83680866

邮箱: sales@apollounion.com

Sensorex New "Calomel Free" Epoxy and Glass Body pH Electrodes

ORDERING INFORMATION			
pH Electrodes			
Part No.	Size	Dimension (see page 2)	
S200CIT	12mm x 150mm Plastic Sealed Reference	1	
SG200CIT	12mm x 150mm Glass Sealed Reference	1	
S201CIT	12mm x 150mm Plastic Re-fillable Reference	1	
SG201CIT	12mm x 150mm Glass Re-fillable Reference	1	
S300CIT	9.5mm x 300mm Plastic Sealed Reference	2	
SG300CIT	9.5mm x 300mm Glass Sealed Reference	2	
S900CIT	6mm x 150mm Plastic Sealed Reference	3	
SG900CIT	6mm x 150mm Glass Sealed Reference	3	
Reference Electrode	es		
Part No.	Size	Dimension (see page 2)	
S200RIT	12mm x 150mm Plastic Sealed Reference only	1	
SG201RIT	12mm x 150mm Glass Refillable Reference only	1	
Accessories			
Part No.	Description	Quantity	
S21	Refill/storage solution for Calomel-Free electrodes	4 oz.	

深圳市新世联科技有限公司

邮编:518031

地址: 深圳市深南中路2066号华能大厦712室

电话: 0755-83680810 83680820 83680830 83680860

网址: www.apollounion.com

传真: 0755-83680866

邮箱: sales@apollounion.com